

FEATURES

- **Compact (half-size).**

The base area is approximately half the size of conventional (JS-M) relays. The controller unit can be made more compact.

Base area has been reduced by one half


- **Standard terminal pitch employed**

The terminal array used is identical to that used in small automotive relays.


- **Plastic sealed type.**

Plastically sealed for automatic cleaning.

- **Line-up of 1 Form A and 1 Form C.**



mm inch

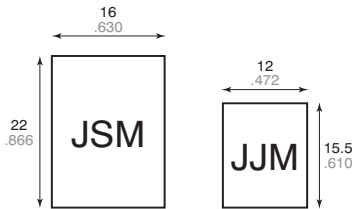

- **Perfect for automobile electrical systems.**

Over 2×10^5 openings possible with a 14 V DC motor load, an inrush current of 25 A, and steady state current of 5 A. (N.O. side)

TYPICAL APPLICATIONS

- Power windows
- Auto door lock
- Electrically powered sun roof
- Electrically powered mirror
- Cornerring lamp, etc.

SPECIFICATIONS

Contact

| | | | | |
|--|---------------------------------------|--|--|--|
| Arrangement | 1 Form A | | 1 Form C | |
| Contact material | Ag alloy (Cadmium free) | | | |
| Initial contact resistance (Initial) (By voltage drop 6V DC 1A) | Typ. 5 mΩ | | | |
| Rating (resistive load) | Nominal switching capacity | 20 A 14 V DC | 20 A 14 V DC (N.O.) 10 A 14 V DC (N.C.) | |
| | Min. switching capacity ^{#1} | 1 A 12 V DC | | |
| | Max. carrying current | N.O.: 35 A (12V, at 20°C 68°F for 2 minutes) 25 A (12V, at 20°C 68°F for 1 hour) 30 A (12V, at 85°C 185°F for 2 minutes) 20 A (12V, at 85°C 185°F for 1 hour) | | |
| Expected life (min. operations) | Mechanical (at 120cpm) | 10 ⁷ | | |
| | Electrical (at rated load) | Resistive | 10 ⁵ *1 | 10 ⁵ (N.O.)*2 10 ⁵ (N.C.)*3 |
| | | Motor load | 2×10 ⁵ *4 5×10 ⁴ *5 | 2×10 ⁵ (N.O.)*6 5×10 ⁴ (N.O.)*7 2×10 ⁵ (N.C.)*8 |

Coil

| | |
|-------------------------|--------|
| Nominal operating power | 640 mW |
|-------------------------|--------|

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

Remarks

- *1 at 20 A 14 V DC, at 20 cpm, operating frequency: 1s ON, 9s OFF
- *2 at 20 A 14 V DC, operating frequency: 1s ON, 9s OFF
- *3 at 10 A 14 V DC, at 20 cpm, operating frequency: 1s ON, 9s OFF
- *4 at 5 A (steady), 25 A (inrush) 14 V DC
- *5 at 20 A 14 V DC (Motor lock), operating frequency: 0.5 s ON, 9.5 s OFF
- *6 at 5A (steady), 25 A (inrush) 14 V DC

Characteristics

| | | |
|--|----------------------------|--|
| Max. operating speed (at rated load) | 6 cpm | |
| Initial insulation resistance ^{*9} | Min. 100 MΩ (at 500 V DC) | |
| Initial breakdown voltage ^{*10} | Between open contacts | 500 Vrms for 1min. |
| | Between contact and coil | 500 Vrms for 1min. |
| Operate time ^{*11} (at nominal voltage) | Max. 10 ms (at 20°C 68°F) | |
| Release time (without diode) ^{*11} (at nominal voltage) (Initial) | Max. 10 ms (at 20°C 68°F) | |
| Shock resistance | Functional ^{*12} | Min. 100 m/s ² {10 G} |
| | Destructive ^{*13} | Min. 1,000 m/s ² {100 G} |
| Vibration resistance | Functional ^{*14} | 10 Hz to 100 Hz, Min. 44.1 m/s ² {4.5 G} |
| | Destructive | 10 Hz to 500 Hz, Min. 44.1 m/s ² {4.5 G} |
| Conditions in case of operation, transport and storage ^{*15} (Not freezing and condensing at low temperature) | Ambient temp. | -40°C to +85°C -40°F to +185°F |
| | Humidity | 5% R.H. to 85% R.H. |
| Mass | Approx. 5 g .176 oz | |

*7 at 20 A 14 V DC (Motor lock)

*8 at peak 20 A 14 V DC (Braking current) operating frequency: 0.5 s ON, 9.5 s OFF

*9 Measurement at same location as "Initial break down voltage" section.

*10 Detection current: 10mA

*11 Excluding contact bounce time.

*12 Half-wave pulse of sine wave: 11 ms; detection time: 10 μs

*13 Half-wave pulse of sine wave: 6 ms

*14 Detection time: 10 μs


*15 Refer to 6. Conditions for operation, transport and storage mentioned in

[AMBIENT ENVIRONMENT \(p. 19, Relay Technical Information\)](#).

Please inquire if you will be using the relay in a high temperature atmosphere (110°C 230°F).

ORDERING INFORMATION

Ex. JJM



| Contact arrangement | Coil voltage(DC) |
|-----------------------------|------------------|
| 1a: 1 Form A 1: 1 Form C | 12 V |

(Note) Standard packing: Carton: 50 pcs.; Case: 1,000 pcs.


TYPES AND COIL DATA (at 20°C 68°F)

| Contact arrangement | Part No. | Nominal voltage, V DC | Pick-up voltage, V DC (Initial) | Drop-out voltage, V DC (Initial) | Coil resistance Ω | Nominal operating current mA | Nominal operating power mW | Usable voltage range, V DC |
|---------------------|------------|-----------------------|---------------------------------|----------------------------------|--------------------------|------------------------------|----------------------------|----------------------------|
| 1 Form A | JJM1a-12 V | 12 | Max. 7.2 | Min. 1.0 | 225 \pm 10% | 53.3 \pm 10% | 640 | 10 to 16 |
| 1 Form C | JJM1-12 V | 12 | Max. 7.2 | Min. 1.0 | 225 \pm 10% | 53.3 \pm 10% | 640 | 10 to 16 |

* Other pick-up voltage types are also available. Please contact us for details.


DIMENSIONS

mm inch

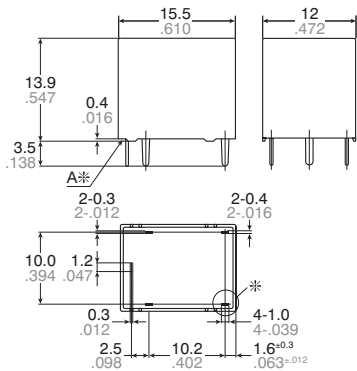


Note: *Marked terminal is only for 1Form C type

Schematic (Bottom view)



PC board pattern (Bottom view)

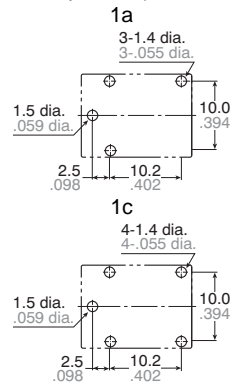

* Dimensions (thickness and width) of terminal specified in this catalog is measured before pre-soldering. Intervals between terminals is measured at A surface level.

Tolerance: $\pm 0.1 \pm 0.004$

| Dimension: | General tolerance |
|-----------------------------|---------------------|
| Max. 1mm .039 inch: | $\pm 0.1 \pm 0.004$ |
| 1 to 3mm .039 to .118 inch: | $\pm 0.2 \pm 0.008$ |
| Min. 3mm .118 inch: | $\pm 0.3 \pm 0.012$ |




REFERENCE DATA

1. Coil temperature rise


Sample: JJM1-12V, 6pcs
Point measured: Inside the coil
Contact current: Now current through contact, 5A, 10A, 15A, 20A
Resistance method, ambient temperature 85°C 185°F

2. Max. switching capability (Resistive load)


3. Ambient temperature and operating voltage range

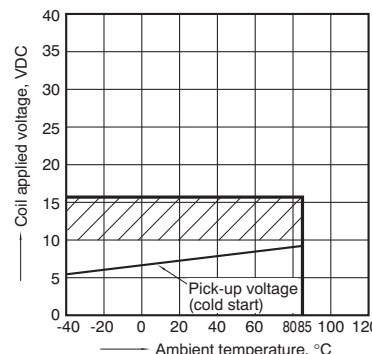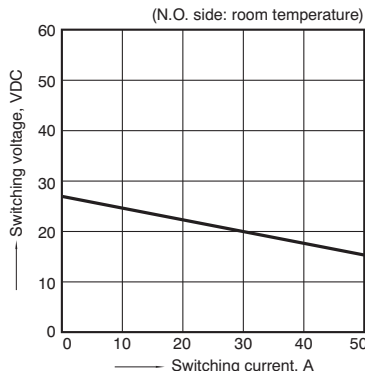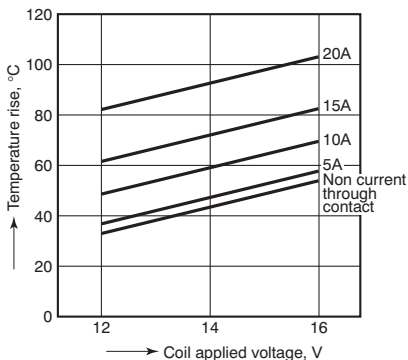


4. Distribution of pick-up and drop-out voltage
Sample: JJM1-12V, 100pcs

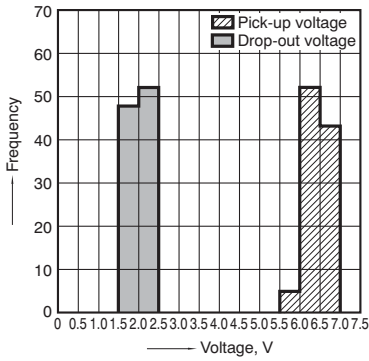

5. Distribution of operate time
Sample: JJM1-12V, 100pcs

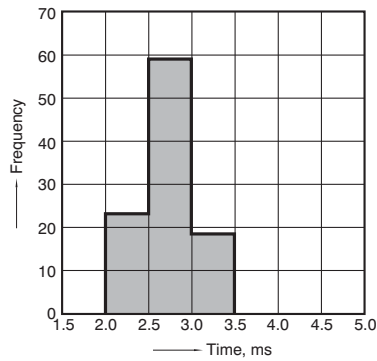


6. Distribution of release time
Sample: JJM1-12V, 100pcs
* With diode

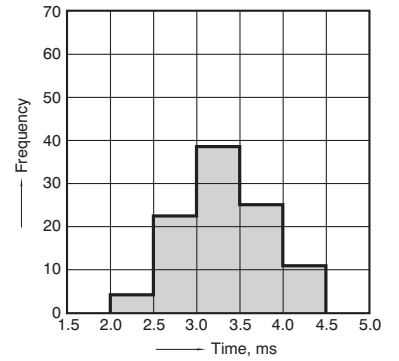

7-(1). Electrical life test (at rated load)


Sample: JJM1-12V
Quantity: n = 6 (NC = 3, NO = 3)
Load: Resistive load (NC side: 10A 14 V DC, NO side: 20 A 14 V DC); Operating frequency: ON 1s, OFF 9s
Ambient temperature: Room temperature

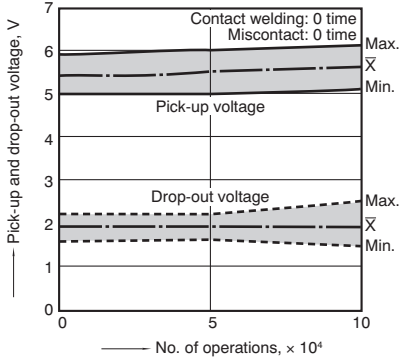


7-(2). Electrical life test (Motor free)

Sample: JJM1-12V, 6pcs.
Load: 5A, Inrush 25A, Brake current 18A 14V DC, Power window motor load (Free condition).
Operating frequency: (ON : OFF = 0.5s : 9.5s)
Ambient temperature: Room temperature


Circuit :

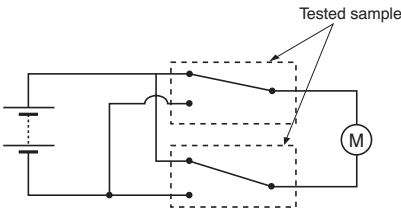

Change of pick-up and drop-out voltage

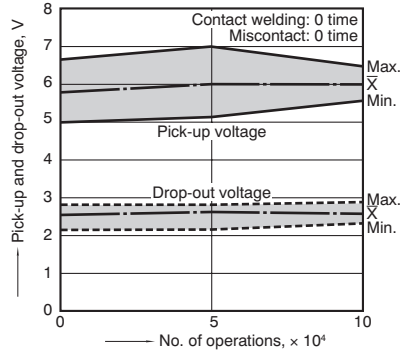


Change of contact resistance

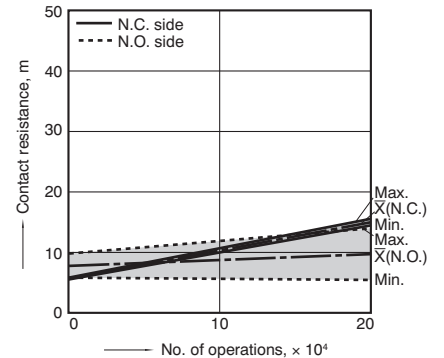


7-(3). Electrical life test (Motor lock)

Sample: JJM1-12V, 6pcs.
Load: 20A, 14VDC, Power window motor actual load (lock condition).
Operating frequency: (ON : OFF = 1s : 5s)
Ambient temperature: Room temperature


Circuit :

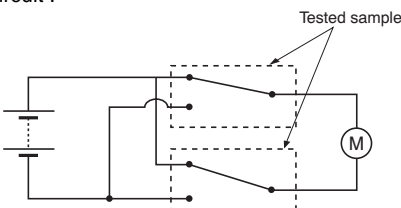

Change of pick-up and drop-out voltage

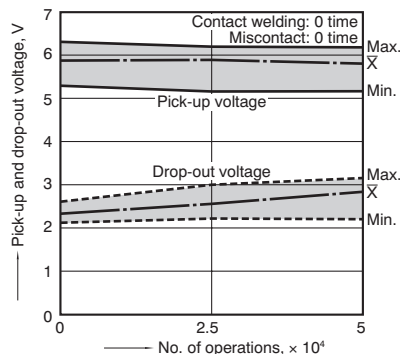

Change of contact resistance

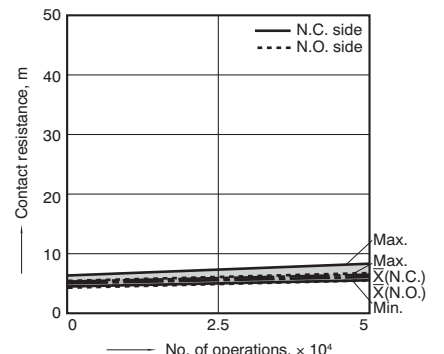


JJ-M


7-(4). Electrical life test (Lamp load)

Sample: JJM1-12V, 6pcs.
 Load: 27W+21W, min. 4A (steady), Lamp actual load
 Operating frequency: ON 2s, OFF 13s
 Ambient temperature: Room temperature


Circuit :




Inrush current: 42A, Steady current: 4.4A

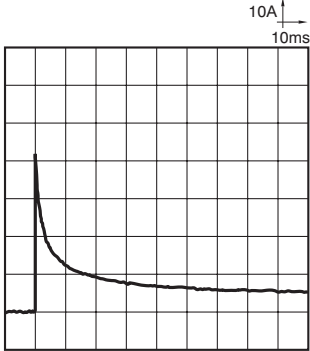

Change of pick-up and drop-out voltage

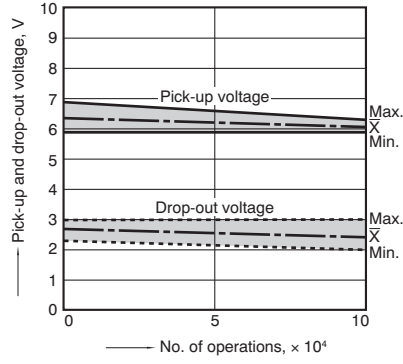

Change of contact resistance

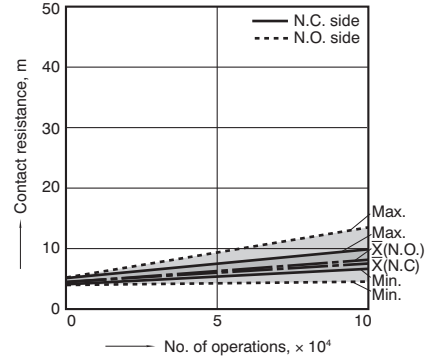

For Cautions for Use, see [Relay Technical Information](#).